

BRASSMASTER PLUS+

Water Softening Systems

HIGH CAPACITY



WHOLE HOUSE

Effective treatment of:

- Water Hardness
- Iron*

Hardness, often comprised of calcium and magnesium (along with iron), is commonly found in both public and private water systems. Left untreated, these minerals can disrupt laundering and bathing, while causing significant scale build up in fixtures, appliances, and plumbing systems.

BrassMaster Plus water softeners use the process of "ion exchange" to effectively remove these undesirable minerals. With advanced electronic control and high capacity resin cleaning technology, these systems provide enhanced iron removal capacity. The result is clean, conditioned water, great for washing and bathing -- and protection for plumbing systems and equipment.

* High iron concentrations may require additional equipment

- ✓ **ELECTRONIC CONTROL MODULE**
- ✓ **SUPERIOR IRON REMOVAL CAPACITY**
- ✓ **GREATER CAPACITY AND FLOW RATE PERFORMANCE**
- ✓ **METER DEMAND FOR PRECISE SALT EFFICIENCY**
- ✓ **EXCLUSIVE 5 YEAR APM WARRANTY**
- ✓ **5 YEAR TANK WARRANTY**



Where NATURE & SCIENCE meet.™



BRASSMASTER PLUS+

Water Softening Systems

RESIDENTIAL




Nearly all serviceable parts lie within the removable/replaceable APM module. This eliminates costly and time consuming field repairs.



BrassMaster Plus water softeners utilize the "ion exchange" process to remove undesirable hardness minerals. Incoming water passes through a bed of cation resin, where hardness is exchanged for very tiny amounts of sodium. Periodically, after a specified amount of hardness has been exchanged, a salt solution is used to "regenerate" the resin bed. Captured hardness minerals, along with excess salt solution, are sent to a drain. This leaves behind a recharged bed of resin, ready again for service.

Specifications	CABINET MODELS		TWO-TANK MODELS			
	BP27	BP35	BPT27	BPT35	BPT48	BPT60
Softening capacity [grains]	27,000	35,000	27,000	35,000	48,000	60,000
Lbs salt / regeneration	9	12	9	12	18	22
Max flow rate [GPM]	12	14	12	14	14	14
Backwash rate [GPM]	2.0	3.5	2.0	3.5	3.5	3.5
Brine tank salt capacity [lbs]	200	200	300	300	300	300
Iron capacity [PPM]	4	4	4	4	4	4
Mineral tank dimensions	9" x 35"	10" x 35"	8" x 44"	10" x 44"	10" x 47"	10" x 54"
Brine tank dimensions	12¾" x 22½"	12¾" x 22½"	18" x 33"	18" x 33"	18" x 33"	18" x 33"
Overall height	44½"	44½"	54"	54"	57"	64"
Inlet / outlet pipe size	¾"	¾"	¾"	¾"	¾"	¾"
Pipe centers [lbs]	2"	2"	2"	2"	2"	2"
Approx. shipping weight [lbs]	60	65	65	70	90	110

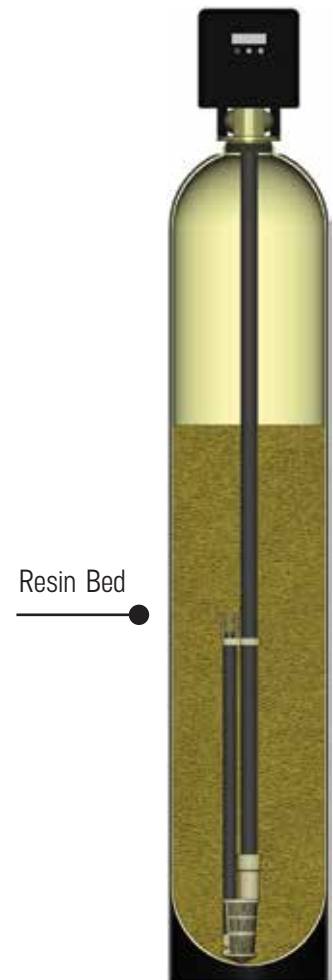

Water Control Corporation
 7150 143rd Ave NW
 Ramsey, MN 55303
 Phone: 866-405-1268
 Fax: 763-427-5665
www.watercontrolinc.com