

Humidi-Pure™ WATER FILTRATION SYSTEMS

PRODUCT OVERVIEW

Increasingly, today's building engineers are recognizing the benefits of high-purity water in adiabatic (misting) and isothermal (boiling) humidification systems. Running this equipment with ordinary tap water requires frequent draining, flushing, and skimming. Even softening, which can provide a degree of relief, does not fully alleviate these maintenance headaches. In contrast, using high-purity [Reverse Osmosis (RO) / Deionized (DI)] water virtually eliminates any maintenance whatsoever on commercial humidifiers. This equates to less system downtime, less wasted effort, and extended equipment lifespans.

*WATER CONTROL OFFERS PRE-PACKAGED WATER SUPPLY SOLUTIONS
FOR COMMERCIAL HUMIDIFICATION EQUIPMENT, FEATURING:*




- 5 standard system sizes (fully customizable)
- All necessary pre-softening and pre-filtration equipment
- High quality membrane filtration (RO) units
- Hydropneumatic and/or atmospheric storage tanks
- 316 stainless steel delivery pumps
- Optional ultraviolet (UV) and submicron post-filtration
- All required valves, gauges, test ports, and controls
- Analog, digital, and SCADA input/output options
- Single-point electrical supply connections
- Equipment pre-wired, pre-plumbed, and secured to high quality, powder-coated aluminum skids

Humidi-Pure™ WATER FILTRATION SYSTEMS

WATER CONTROL OFFERS COMPLETE SYSTEM TESTING (FACTORY & ONSITE) AND COMMISSIONING. Our Field Service Technicians are trained, experienced, and able to provide full aftermarket support. Our qualified design team is ready to assist you with system selection, sizing, submittals, and 3D designs. To get started, contact your local Water Control representative, or call/email us directly.

Be sure to provide the following details:

- Gallons-per-day of high-purity water required
- Gallons-per-minute flow rate required to equipment
- Desired output pressure to equipment (psi)
- Electrical requirements (voltage, phase)
- Any available data on raw (inlet) water quality (testing service available)

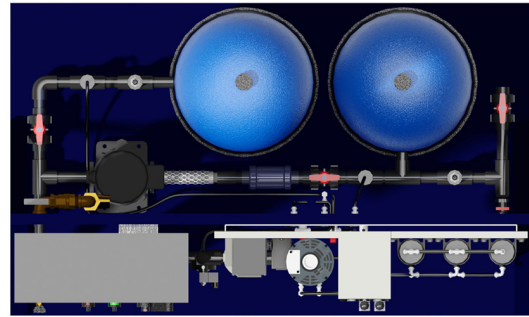

AVAILABLE STANDARD SYSTEMS

Model	Production Rate* (gal/day)	Membrane Size (inches)	Membrane Quantity	Inlet Connection (FNPT) (inches)	Outlet Connection (FNPT) (inches)	Waste Connection (FNPT) (inches)	Storage Tank Size (gal)	Pressure Tank Size (gal)	System Discharge Pressure (PSI)	Delivery Pump Peak Flow Rate (GPM)	Delivery Pump HP	Voltage / Phase	Full Load Amp Draw	Skid Dimensions (L x W x H) (inches)	Approx Ship Weight (lbs)
H-250	250	2.5 x 21	1	1	1	½	40	15	50	5	½	120/1	14.6	60 x 36 x 61	360
H-500	500	2.5 x 21	2	1	1	½	40	15	50	5	½	120/1	14.6	60 x 36 x 61	365
H-1000	1000	2.5 x 21	3	1	1	½	40	15	50	10	¾	120/1	19.4	60 x 36 x 61	375
H-1500	1500	2.5 x 40	2	1	1	½	40	15	50	10	¾	120/1	23.4	60 x 36 x 61	400
H-2000	2000	2.5 x 40	3	1	1	½	40	15	50	10	¾	120/1	23.4	60 x 36 x 61	440

* Gallons per day based on 77 °F feed water temperature.

Note: Other configurations are available upon request.

We have team members throughout the US and Canada who are ready to serve you.

To get started, please talk with your local sales representative, or contact our Technical Support Department: 1-866-405-1268 or techsupport@watercontrolinc.com

Water Control Corporation
7150 143rd Ave NW • Ramsey, MN 55303
Phone: 763-427-9638 • Fax: 763-427-5665
www.watercontrolinc.com

© Water Control Corporation 0617

