

BRASSMASTER

Water Softening Systems

Performance Data Sheet

THESE UNITS ARE CERTIFIED BY IAPMO R&T TO NSF-44 STANDARDS, INCLUDING OPTIONAL SALT AND WATER EFFICIENCY STANDARDS.



WHOLE HOUSE

Effective treatment of:

- Water Hardness
- Iron*

Hardness, often comprised of calcium and magnesium (along with iron), is commonly found in both public and private water systems. Left untreated, these minerals can disrupt laundering and bathing, while causing significant scale build up in fixtures, appliances, and plumbing systems.

BrassMaster water softening systems use the process of "ion exchange" to effectively remove these undesirable minerals. The result is clean, conditioned water, great for washing and bathing -- and protection for plumbing systems and equipment.

* High iron concentrations may require additional equipment

- ✓ **ELECTRONIC CONTROL MODULE**
- ✓ **METER DEMAND OR INTERVAL REGENERATION**
- ✓ **EXCLUSIVE 3 YEAR APM WARRANTY**
- ✓ **5 YEAR TANK WARRANTY**




B32, BT32, BT48, and BT60 are certified by IAPMO R&T against NSF/ANSI 44, NSF/ANSI/CAN 61, and NSF/ANSI/CAN 372.

An Employee-Owned Company



BRASSMASTER

Water Softening Systems



Nearly all serviceable parts lie within the removable/replaceable APM module. This eliminates costly and time consuming field repairs.



Specifications	CABINET MODEL		TWO-TANK MODELS	
	B32	BT32	BT48	BT60
Rated Service Flow Rate [GPM]	7	7	9.6	10.5
Pressure Drop at Rated Service Flow Rate [PSI]	12	12	15	15
Backwash rate [GPM]	1.7	1.7	2.4	4.0
Cubic feet of media	0.80	0.80	1.30	2.00
Standard capacity [Grains]	11,143	12,636	21,285	32,739
Standard Capacity Salt Setting [Lbs]	3.26	3.26	5.30	8.15
Maximum capacity [Grains] ¹	25,093	25,093	40,776	62,733
Max iron capacity [PPM]	2	2	2	2
Mineral tank dimensions	9" x 35"	8" x 44"	10" x 47"	13" x 54"
Brine tank dimensions	14" x 21"	18" x 33"	18" x 33"	18" x 33"
Brine tank salt capacity [lbs]	200	300	300	300
Overall height	44"	53"	57"	64"
Inlet / outlet pipe size ²	1"	1"	1"	1"
Inlet / Outlet Height (To Center)	37"	46"	47"	56"
Pipe centers	2"	2"	2"	2"
Approx. shipping weight [lbs]	80	80	115	170

¹ The capacity rating is based on a salt setting of 15 lbs/cuft. This setting is not certified by IAPMO RGT against NSF 44 and the claim is coming from manufacturer's internal testing only. This setting does not meet salt or water efficiency requirements as defined by NSF/ANSI 44.

² Standard unit features 1" NPTM connection. Other connection configurations are available. Contact WCC for additional information.

*System operating pressure is 20 psi minimum and 100 psi maximum.

*System operating temperature is 40F minimum and 110F maximum.


BrassMaster water softeners utilize the "ion exchange" process to remove undesirable hardness minerals. Incoming water passes through a bed of cation resin, where hardness is exchanged for very tiny amounts of sodium. Periodically, after a specified amount of hardness has been exchanged, a salt solution is used to "regenerate" the resin bed. Captured hardness minerals, along with excess salt solution, are sent to a drain. This leaves behind a recharged bed of resin, ready again for service.

NOTE:

- This equipment is not intended to be used for treating water that is microbiologically unsafe or of unknown quality without disinfection before or after the system.
- This system and installation must comply with local and state laws and regulations.
- Efficiency rated water softeners shall have a rated salt efficiency of not less than 3,350 grains of total hardness exchange per pound of salt [based on NaCl equivalency] [477 g of total hardness exchange per kilogram of salt] and shall not deliver more salt or be operated at a sustained maximum service flow rate greater than its listed rating.
- Efficiency is measured by a laboratory test described in NSF/ANSI 44; that the test represents the maximum possible efficiency the system can achieve; that operational efficiency is the actual efficiency achieved after the system has been installed; and that operational efficiency is typically less than the efficiency due to individual application factors including water hardness, water usage, and other contaminants that reduce the softener's capacity.
- Efficiency rated water softener is a DIR softener, which also complies with specific performance specifications intended to minimize the amount of regenerant brine and water used in its operation

* WCC recommends the use of clean, pellet salt.

* See official warranty for details.

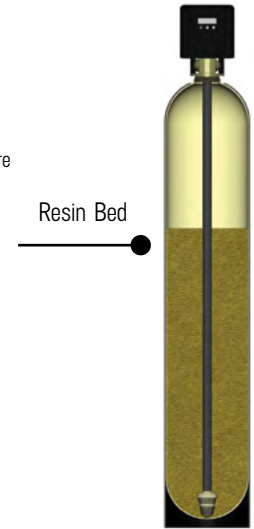

Water Control Corporation
7150 143rd Ave NW • Ramsey, MN 55303
Phone: 763-427-9638 watercontrolinc.com