



Northwoods®[®]

Water Softening System



Light, seasonal use for effective treatment of:

- ◆ Water hardness
- ◆ Iron*

Features

- ◆ Perfect size for cabin, marine, and condo use
- ◆ Electronic control module
- ◆ Metered regeneration for precise salt efficiency
- ◆ Exclusive 3 year APM™ warranty
- ◆ 5 year tank warranty

Hardness, often comprised of calcium and magnesium (along with iron), is commonly found in both public and private water systems. Left untreated, these minerals can disrupt laundering and bathing, while causing significant scale build up in fixtures, appliances, and plumbing systems.

* High iron concentrations may require additional equipment


** See official warranty for details



B12 is certified by IAPMO R&T against NSF/ ANSI/CAN 61 and 372 for material safety and lead free requirement only



Northwoods® Water Softening System



Nearly all serviceable parts lie within the removable/replaceable APM™ module. This eliminates costly and time consuming field repairs.



Specifications	B12
Softening Capacity (grains) ¹	9,500
Lbs Salt / Regeneration	5
Max Flow Rate (gpm)	10
Backwash Rate (gpm)	1.7
Brine Tank Salt Capacity (lbs)	40
Iron Capacity (ppm)	1
Mineral Tank Dimensions (in)	9 x 18
Brine Tank Dimensions (L x W x H) (in)	21 x 14 x 18
Overall Height (in)	27
Inlet / Outlet Pipe Size (in)	1
Pipe Centers (in)	2
Approx. Shipping Weight (lbs)	45

¹The capacity rating is based on a salt setting of 10 lbs/cu. ft. This setting is not certified by IAPMO R&T against NSF44 and the claim is coming from manufacturer's internal testing only.

*System operating pressure is 20 psi minimum and 100 psi maximum

*System operating temperature is 40°F and minimum and 110°F maximum

*This equipment is not intended to be used for treating water that is microbiologically unsafe or of unknown quality without disinfection before or after the system.

*This system and installation must comply with local and state laws and regulations.


How it works

BrassMaster water softeners utilize the "ion exchange" process to remove undesirable hardness minerals. Incoming water passes through a bed of cation resin, where hardness is exchanged for very tiny amounts of sodium. Periodically, after a specified amount of hardness has been exchanged, a salt solution is used to "regenerate" the resin bed. Captured hardness minerals, along with excess salt solution, are sent to drain. This leaves behind a recharged bed of resin, ready again for service.

Northwoods® series softeners offer the most compact softening solution in the marketplace. The "cabinet" design provides two tanks (media and brine) in one, and is easily removable for facility winterization.

NOTE:
*WCC recommends the use of clean pellet salt

Primary components

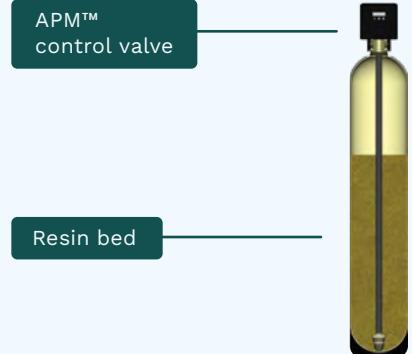

7150 143rd Ave NW
Ramsey, MN 55303

www.watercontrolinc.com
1-866-405-1268